



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

**Patentanmeldung Nr. Patent application No. Demande de brevet n°**

03029277.5

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**

BEST AVAILABLE COPY



Anmeldung Nr:  
Application no.: 03029277.5  
Demande no:

Anmeldetag:  
Date of filing: 22.12.03  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

TELEFONAKTIEBOLAGET LM ERICSSON (publ)

126 25 Stockholm  
SUEDE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se referer à la description.)

Method and telecommunications system for controlling paging flow in a network for  
cellular communications

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H04Q7/38

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

---

**METHOD AND TELECOMMUNICATIONS SYSTEM FOR CONTROLLING  
PAGING FLOW IN A NETWORK FOR CELLULAR COMMUNICATIONS**

---

**Field of the invention**

5           The present invention relates to a method and telecommunications system for controlling paging flow in a network for cellular communications.

**Background of the invention**

          In a network for cellular communications, the geographical area of coverage for mobile communications is subdivided into smaller areas, either logical areas or physical  
10   areas. In particular, a geographical area comprises cells and location areas.

          A cell is an area in which a user can communicate with a certain base station. A location area is an area comprising a plurality of cells and it is associated with a Visitor Location Register (VLR), which stores data about all customers who are roaming within the corresponding location area.

15           Figure 1 shows an example of arrangement of such areas, in which three location areas 11a, 11b and 11c are associated to respective Mobile Services Switching Centers (MSCs) 14a, 14b and 14c and in which each location area comprises a plurality of cells 12. In the figure, the areas fit complementarily with each other for the sake of simplicity, but it is clear that other arrangements known to the skilled in the art may be  
20   provided.

          If an incoming transaction directed to a certain Mobile Station (MS) is received in the network (e.g. a call by another party), in order to locate the mobile station a paging request is sent to all the base stations in the location area in which the "target" mobile station is registered. When the mobile station discovers that it is being paged, a channel

~~on the radio interface is activated, the mobile station sends a page response indicating~~  
that it has been paged and that the network can locate it.

In a location area, a great number of mobile stations is present, and the number of paging requests/responses transmitted in that location area increases with the number  
5 of mobile stations within the location area.

The increasing proliferation of mobile stations, due to the great convenience of mobile communications and the growth of additional services provided by the operators, may cause congestion in the network. In fact, the number of the available radio resources is limited and the network congestion is a drawback the operator should avoid in order  
10 not to offer services which cannot be duly handled by the network.

Moreover, requests concerning services of prime importance such as positioning request in case of emergency or law enforcement may not be served in case of congestion, this being an unacceptable drawback that greatly reduces the advantages of Location Services.

15 The same problem affects Location Services transactions deriving from a request for last known location of the target mobile station. Such information is usually stored at the Mobile Services Switching Center and accordingly it is straightforward for the Mobile Services Switching Center to handle such request. Again, a congestion make such a simple request unduly complicated to handle.

20 These drawbacks are not only unacceptable per se for a modern mobile network, but they also imply important loss of profit and disadvantages both for the operator, since the subscribers are not encouraged in taking advantage of their services, and for the subscribers, who deny themselves of useful services in which they may enroll if such services appeared to be more efficient.

~~At present, a mechanism for controlling the influx of calls per location area is~~  
known and it used for Call Control (CC) transactions only. In fact, for CC transactions,  
before the paging is ordered, a Roaming Number is allocated through which the call is  
routed from the Gateway Mobile Services Switching Center receiving the incoming call  
5 to the MSC/VLR associated with the location area of the target mobile station. The  
known mechanism consists in defining (at the operator side) how many roaming number  
allocations will be permitted for a specific location area at the same time.

However no such mechanism is known for allowing the operator to control the  
paging flow of other transactions, such as Supplementary Services (SS), Short Message  
10 Services (SMS) and LoCation Services (LCS) transactions.

In fact, when a SS, SMS or LCS transaction is received at the MSC/VLR, a  
paging is ordered and the only way to control the amount of requested paging may be on  
network level, by controlling the file size of the software that controls the paging  
mechanism. This handling is however inefficient, because it does not take into account  
15 the configuration of the network, in which different location areas have different radio-  
resource capacities.

In addition, this mechanism cannot protect the radio network from congestion  
when bursts of paging requests are destined to the same location area, for example when  
an important athletics event or football match takes place in a stadium.

20 **Summary of the invention**

Aim of the present invention is to overcome the above mentioned drawbacks,  
particularly by providing a method and a telecommunications system which controls the  
paging flow at a service node in a more robust way.

Within the scope of this aim, a particular object of the invention is to meet the  
25 requirements for either the mobile subscriber, the service provider and the operator.

~~Another object is to prioritize services which are of most importance with~~  
respect to the resource allocation of the system.

This aim, these objects and other which will become apparent from the following description are achieved by a method of controlling paging flow in a network  
5 for cellular communications characterized in that it comprises the steps of: at a control node, receiving a request for paging a mobile station; determining a location area in which the paging shall be performed; checking whether the number of paging transactions which are ongoing for the location area is lower than at least one maximum number of ongoing paging transactions allowed for the location area; after a  
10 determination that the number of ongoing paging transactions is lower than the maximum number, updating the number of ongoing paging transactions for the location area and processing the paging request.

According to a particular aspect of the present invention, a checking is performed so as to determine whether the incoming request is related to a Location  
15 Service. According to another aspect of the present invention, which can be alternative or parallel to the former one, checking is performed so as to determine whether the incoming request is of a particular kind, for example a kind which is profitable either for the operator or the subscribers within a location area, and which can be prioritized accordingly.

20 The aim and the objects of the present invention are also achieved by a telecommunications system for controlling a paging flow in a network for cellular communications comprising at least one control node associated with a location area serving a mobile station to be paged, the control node comprising means for receiving paging requests, characterized in that the system comprises: memory means for storing at  
25 least one maximum number of ongoing paging transactions allowed for the location area



~~and for storing the number of ongoing paging transactions; comparing means for~~  
checking whether the number of ongoing paging transactions is lower than the at least  
one maximum number; paging means for paging the mobile station in response to an  
outcome of the comparing means.

5           Advantageously, the telecommunications system comprises Location Services  
Request determining means for determining whether a paging request received by the  
control node derives from a Location Services request, which means are preferably set so  
as to check whether the Location Services request is a request for last known location of  
the mobile station.

10           Alternatively or additionally, the Location Services Request determining means  
are set so as to check whether the Location Services request comes from an Emergency  
Center or a Law Enforcement Agency.

          Preferably, the control node comprises buffer means for temporarily storing said  
paging request if the Location request is a request coming from an Emergency Center or  
15   from a Law Enforcement Agency, the paging means being set so as to serve the paging  
request with priority.

          According to an embodiment of the invention, only one maximum number is  
defined which is representative of the overall number of ongoing paging transactions for  
the particular location area, regardless of the kind of transaction.

20           According to another embodiment of the present invention, more than one  
maximum number is defined for the same location area. In particular, a respective  
maximum number of permitted ongoing paging transactions is defined for each kind of  
transaction.

          According to yet another embodiment of the present invention, two maximum  
25   numbers are defined at the control node, namely a first maximum number representative

of the maximum number of allowed ongoing CC, SS, SMS paging transactions, and a second maximum number indicative of the maximum number of allowed ongoing LCS transactions.

**Brief description of the drawings**

Further characteristics and advantages of the invention will become better apparent from the following description of preferred but not exclusive embodiments of the method and the telecommunications system for controlling paging flow, illustrated by way of non-limitative embodiments in the accompanying drawings, wherein:

Figure 1 is a block diagram of a conventional cellular network;

Figure 2 is a block diagram of the layered structure of GSM/UMTS;

Figure 3 is a flow diagram illustrating steps of a paging flow control method according to the invention;

Figure 4 is a flow diagram connected to the diagram of figure 3 illustrating a particular paging process according to the invention;

Figure 5 is a flow diagram connected to the diagram of figure 3 illustrating the management of LCS transactions according to a preferred embodiment of the invention.

**Detailed description of the preferred embodiments**

As anticipated above, with reference to Figure 1, a typical GSM network comprises a plurality of cells 12, which are associated with at least one Base Station 13, schematically represented by a tower antenna, and which are grouped so as to form location areas 11a, 11b and 11c associated with a geographical zone. Such location areas are served by a respective Visitor Location Register (VLR), for instance VLR 15, which is preferably comprised or connected to at least one control node, in particular at least one Mobile Services Switching Center (MSC) 14a, 14b and 14c (MSC/VLR).



~~The basic function of MSC/VLR is to switch speech and data connections~~  
between Base Station Controllers (BSCs), other MSCs, other networks and external non-  
mobile networks. The MSC also handles a number of functions associated with mobile  
subscribers, among others registration, location updating and handover between a user  
5 equipment and the Public Land Mobile Network (PLMN).

The VLR stores data about all customers who are roaming within the location  
area of the corresponding MSC. This data is updated through a location update  
procedure initiated from the mobile station via the MSC, or directly from the  
subscriber's Home Location Register (HLR) or Home Subscriber Server (HSS).

10 The HLR/HSS is the home register of the subscriber, which particularly stores  
information about the subscription, the services which are allowed to the subscriber and  
the subscriber's location. When the subscriber roams into the location area of an MSC  
different from the home MSC, the HLR/HSS is updated accordingly.

It is clear to the skilled in the art that the control node of the network can be a  
15 SGSN support node, should the network be a GPRS network.

It is known that the GSM/UMTS system can be illustrated as comprising a  
number of functional layers hierarchically arranged, as shown in Figure 2. Such layers  
can be defined for both the MSC (layers 200) and the mobile station (layers 205).

A first layer (20, 24) comprises the physical layer, which represents the physical  
20 means for interfacing the various devices of the network, and the data-link layer, which  
provides data link services and functionality.

A second layer is the so-called Radio Interface layer, and it comprises three sub-  
layers: a Radio Resource (RR) management sub-layer (21, 25), a Mobility Management  
(MM) sub-layer (22, 26) and a Connection Management (CM) sub-layer (23, 27).

~~The RR-sub-layer 21 is responsible for channel handling. The MM-sub-layer 22,~~  
handles together with CM sub-layer 23 various transaction types, in particular Call  
Control transactions (CC layer 23a, 27a), Supplementary Services transactions (SS layer  
23b, 27b), Short Message Service transactions (SMS layer 23c, 27c) and LoCation  
5 Services transactions (LCS layer 23d, 27d).

For each location area, a plurality of such call-related or services-related  
transactions may arrive at the MSC/VLR. According to the invention, at least one  
maximum number of allowed paging transactions is defined for each location area.

According to an embodiment of the invention, only one maximum number is  
10 defined which is representative of the overall number of ongoing paging transactions for  
the particular location area, regardless of the kind of transaction, i.e. regardless of  
whether the incoming paging request regards CC, SS, SMS or LCS transactions.

Such maximum number is stored in memory means which, in a preferred  
embodiment, are provided within the VLR of the location area. Alternatively, the  
15 memory means are an integral part of the MSC of the same location area or they are  
located in other entities which can be accessed by the MSC/VLR.

According to another embodiment of the present invention, more than one  
maximum number is defined for the same location area. In particular, a respective  
maximum number of permitted ongoing paging transactions is defined for each kind of  
20 transaction.

According to another embodiment of the present invention, two maximum  
numbers are defined at the MSC/VLR, namely a first maximum number representative  
of the maximum number of allowed ongoing CC, SS, SMS paging transactions, and a  
second maximum number indicative of the maximum number of allowed ongoing LCS  
25 transactions.

~~The skilled in the art will not have any difficulty in defining other groupings of~~  
kind of transactions for which a maximum number can be defined. Such groupings can be defined in order to meet the operator requirements, for example in order to allocate more resources to the type of traffic which is preferred by an operator.

5           According to the amount of maximum numbers defined for a location area, one or more counters are preferably provided for registering and updating the current number of ongoing transactions. Such counters are preferably located at the MSC, but they may be located at other entities accessible by the MSC in the location area.

10           With reference to Figure 3, a flow chart is depicted illustrating the method according to an embodiment of the invention in which a maximum number indicative of the overall number of allowed parallel transactions is defined at the MSC/VLR.

          At step 300 the procedure is initiated by a transaction sent by any of the users of the Mobility Management sub-layer, which orders paging for reaching a target mobile station (MS).

15           At step 305 the request is received at the MSC/VLR, in the form of a MAP operation which, for example, may be one of the following:  
MAP\_UNSTRUCTURED\_SS\_REQUEST, MAP\_UNSTRUCTURED\_SS\_NOTIFY,  
MAP\_MT\_FORWARD\_SHORT\_MESSAGE, MAP\_PROVIDE\_SUBSCRIBER\_LOCATION,  
MAP\_PROVIDE\_ROAMING\_NUMBER.

20           At step 310 paging is triggered by the received MAP operation. If the MAP operation is a MAP\_PROVIDE\_ROAMING\_NUMBER operation, then it might not trigger immediately a paging request. However, the paging request is sent as soon as the Initial Address Message (IAM) is received from the Gateway Mobile Services Switching Center (GMSC).

---

At step ~~315~~ the Location Area (LA) where the subscriber is currently roaming is fetched from the VLR 15.

At step 320 it is checked whether the number of paging transactions which are ongoing for the location area determined at step 315 is lower than at least one maximum  
5 number of ongoing paging transactions allowed for the LA. The number of ongoing paging transactions is preferably kept by a counter at the MSC as indicated herein above.

If the maximum number of allowed paging transactions has not been reached at step 320, the paging request is substantially accepted by the MSC and the procedure jumps to step 325, as illustrated in Figure 4.

10 In particular, at step 405 the counter of ongoing transactions is incremented so as to take into account the newly accepted paging request. Then, at step 410, the mobile station is paged, i.e. the paging request is sent to the Base Station Controller and then the paging response message is received from the mobile station.

After receiving the paging response message, the counter is decremented at step  
15 415.

Then, at step 420, it is checked whether previous LCS requests are still pending, by controlling the status of buffer means which will be described hereinafter. If so, the procedure jumps to step 430 and one pending LCS request is served, starting from step 530 as it will be described with reference to figure 5.

20 Otherwise, if no previous LCS request is pending or if the buffer means are empty, the system returns in a waiting mode at step 340, i.e. it is available to receive new MAP operations.

If the maximum number of allowed paging transactions has been reached or exceeded at step 320, then a further check is performed at step 330 in order to check  
25 whether the MAP operation comes from the LCS layer.

~~If not, at step 335 the MAP operation is rejected, an error code is returned~~  
indicating resource limitation, and the procedure ends at step 340.

Otherwise, if it is determined that the MAP operation does come from the LCS layer at step 330, the procedure jumps to step 345, as illustrated in Figure 5.

5       At step 505, it is checked whether the incoming LCS operation indicates that a 'Last Known Location' would be acceptable for the requesting entity. If so, at step 510 the Last Known Location information is retrieved from the VLR and then returned with the MAP\_PROVIDE\_SUBSCRIBER\_LOCATION\_ACK message. At step 340 the procedure is ended.

10       If, at step 505, it is determined that no 'Last Known Location' is indicated in the LCS operation, then at step 515 it is checked whether the LCS operation is coming from an emergency center or a law enforcement agency or from entities of equivalent importance. In an alternative embodiment, not shown in the figures, such step is performed directly after step 330 and before the step of determining whether 'Last  
15   Known Location' is indicated in the LCS operation. The outcome of these checking steps will be substantially the same as those of Figure 5.

Returning to the exemplary embodiment illustrated in Figure 5, if it is determined that the LCS operation is not coming from an emergency center or a law enforcement agency, the MAP operation is rejected at step 520 with a 'Resource  
20   Limitation' error code and the procedure ends at step 340.

Otherwise, at step 525 the request is put in a buffer which is preferably within the MSC. This buffer accordingly stores such particular kind of LCS requests, and it is preferably used for performing the above mentioned checking at step 420.

At step 530 it is checked whether at least one paging request has been finalized,  
25   for example by checking whether the counter has been decremented with respect to the



previous check (at step 320 or at step 530 itself). Step 530 is also reached by the above described step 430.

5 The checking at step 530 is repeated until it is verified that the number of ongoing paging transactions has become lower than the maximum number of allowed ongoing transactions. As soon as this condition is met, the request is picked up from the buffer at step 535 and the LCS operation is served with priority, before any other current incoming transaction, by jumping to the above-described step 325. It is clear to the skilled in the art that the above described exemplary embodiment may be easily modified without departing from the scope of the invention. In particular, if several maximum  
10 numbers are defined by the operator in order to differentiate and manage different kinds of transactions, the procedure described with reference to Figures 3 and 4 is performed for each kind of transaction, while the procedure described with reference to Figure 5 is preferably performed for LCS transactions only.

15 The skilled in the art easily understands that the above described steps may be performed by any computer hardware and/or software and telecommunications means programmed through conventional techniques in order to take into account the additional information data needed by the present invention. A combination of processor, memory and communication means is required in order to receive and process the requests, together with checking and determining means, preferably implemented through  
20 software, for determining the availability of resources and/or the kind of requests according to the invention.

The invention is therefore preferably implemented by introducing new functionality in existing systems, through conventional techniques which are clearly in the reach of the average technician and, therefore, are not hereby discussed in detail.



~~It has thus been shown that the present invention fulfils the proposed aim and~~  
objects. In particular, it is seen that both mobile subscribers and the service provider may  
benefit of important services, like positioning due to emergency requests, which are  
always processed and prioritized. From the operator's point of view, it is seen that the  
5 operator can avoid congestion and flexibly allocate resources so as to adapt to the  
evolution of the radio network. Moreover, management of paging transactions can be  
customized, for example, in order to prioritize operations with higher costs on the  
resource allocation of the system, this resulting more profitable.

Clearly, several modifications will be apparent to and can be readily made by  
10 the skilled in the art without departing from the scope of the present invention.  
Therefore, the scope of the claims shall not be limited by the illustrations or the preferred  
embodiments given in the description in the form of examples, but rather the claims shall  
encompass all of the features of patentable novelty that reside in the present invention,  
including all the features that would be treated as equivalents by the skilled in the art.

15 Where technical features mentioned in any claim are followed by reference  
signs, those reference signs have been included for the sole purpose of increasing the  
intelligibility of the claims and, accordingly, such reference signs do not have any  
limiting effect on the interpretation of each element identified by way of example by  
such reference signs.

## **CLAIMS**

---

1. A method of controlling paging flow in a network for cellular communications, characterized in that it comprises the steps of

- 5
- (a) at a control node (14c), receiving (305, 310, 315) a request for paging a mobile station;
  - (b) determining a location area (11c) in which said paging shall be performed;
  - (c) checking (320) whether the number of paging transactions which are ongoing for the location area (11c) is lower than at least one maximum  
10 number of ongoing paging transactions allowed for the location area (11c);
  - (d) after a determination that said number of ongoing paging transactions is lower than said maximum number, updating (325) the number of ongoing  
15 paging transactions for said location area and processing said paging request.

2. The method of claim 1, characterized in that it further comprises the step of:

- 20
- (e) after a determination that said number of ongoing paging transactions is higher than or equal to said maximum number, checking (330) whether said paging request derives from a Location Services request.

3. The method of claim 2, characterized in that it further comprises the step of:

- (f) checking (505) whether said Location Services request is a request for last known location of the mobile station.

~~4. The method of any one of claims 2 or 3, characterized in that it further comprises~~  
the step of:

- (g) checking (515) whether said Location Service request comes from an  
Emergency Center or a Law Enforcement Agency.

5

5. The method of claim 3, characterized in that it comprises the step (510) of  
retrieving information on said last known location from a Visitor Location Register (15).

6. The method of claim 4, characterized in that it comprises the step (525) of, after a  
10 determination that said Location Services request comes from an Emergency Center or a  
Law Enforcement Agency, serving (535, 325) the paging request with priority.

7. The method according to any one of the preceding claims, characterized in that  
said updating step (325) comprises the step (405) of incrementing at least one counter  
15 indicative of said number of ongoing transactions which is comprised in said control  
node (14c) when a paging request is accepted for processing by the control node (14c),  
and the step (415) of decrementing said counter when a paging response has been  
returned by said mobile station.

20 8. The method of claim 1, characterized in that said transactions are of at least one  
kind selected from the group comprising Call Control transactions, Supplementary  
Services transactions, Short Message Service transactions and Location Services  
transactions.

9. ~~The method of any one of claims 1 or 8, characterized in that a respective~~  
maximum number which is allowed for said location area is defined for transactions of  
each of the kind comprising Call Control transactions, Supplementary Services  
transactions, Short Message Service transactions and Location Services transactions,  
5 respectively, said checking step (c) being performed for each kind of transaction.

10. The method of any one of the claims 1 to 9 wherein the control node is a Mobile  
services Switching Centre or a serving General Packet Radio Services support node.

10 11. A telecommunications system for controlling a paging flow in a network for  
cellular communications comprising at least one control node (14c) associated with a  
location area (11c) serving a mobile station to be paged, the control node (14c)  
comprising means for receiving paging requests, characterized in that the system  
comprises:

15 memory means (14c, 15) for storing at least one maximum number of ongoing  
paging transactions allowed for said location area (11c) and for storing the number of  
ongoing paging transactions;

comparing means for checking whether said number of ongoing paging  
transactions is lower than said at least one maximum number;

20 paging means for paging said mobile station in response to an outcome of said  
comparing means.

12. The telecommunications system of claim 11, characterized in that it comprises  
Location Services Request determining means for determining whether a paging request  
25 received by said control node (14c) derives from a Location Services request.

13. The telecommunications system of claim 11, characterized in that said Location Services Request determining means are set so as to check whether said Location Services request is a request for last known location of the mobile station.

5

14. The telecommunications system of any one of claims 11 to 13, characterized in that said Location Services Request determining means are set so as to check whether said Location Services request comes from an Emergency Center or a Law Enforcement Agency.

10

15. The telecommunications system of any one of claims 11 to 14, characterized in that said control nodes (14c) comprises buffer means for temporarily storing said paging request if said Location request is a request coming from an Emergency Center or from a Law Enforcement Agency, said paging means being set so as to serve said paging request with priority.

15

16. The telecommunications system of claim 11, characterized in that said control node (14c) comprises at least one counter indicative of said number of ongoing transactions, said counter being incremented when a paging request is accepted for processing by the control node (14c) and being decremented when a paging response has been returned by said mobile station.

20

17. The telecommunications system of claim 11, characterized in that said memory means comprise stored therein respective maximum numbers indicative of the maximum number of allowed ongoing paging Call Control transactions, Supplementary Services

25

~~transactions, Short Message Service transactions and Location Service transactions,~~  
respectively, said comparing means being set so as said checking is performed for each  
of said Call Control transactions, Supplementary Services transactions, Short Message  
Service transactions and Location Service transactions, respectively.

5

18. The telecommunications system of claim 11, characterized in that said memory  
means are comprised in any one of said Mobile Services Switching Center, a Visitor  
Location Register connected to said Mobile Services Switching Center, a Base Station  
Controller connected to said Mobile Services Switching Center and serving said location  
10 area.

19. The telecommunications system of any one of claims 11 to 18, characterized in  
that said comparing means are comprised in said control node.

15 20. The telecommunications system of any one of claims 11 to 19, characterized in  
that said paging means comprise said Mobile Services Switching Center (14c) and a  
Base Station Controller serving said location area.

21. The telecommunications system according to any one of the preceding claims,  
20 characterized in that said number of ongoing paging transactions is the overall number of  
ongoing transactions, regardless of the kind of transaction.

22. The telecommunications system of any one of the claims 11 to 21 wherein the  
control node is a mobile services switching centre or a serving general packet radio  
25 services support node.



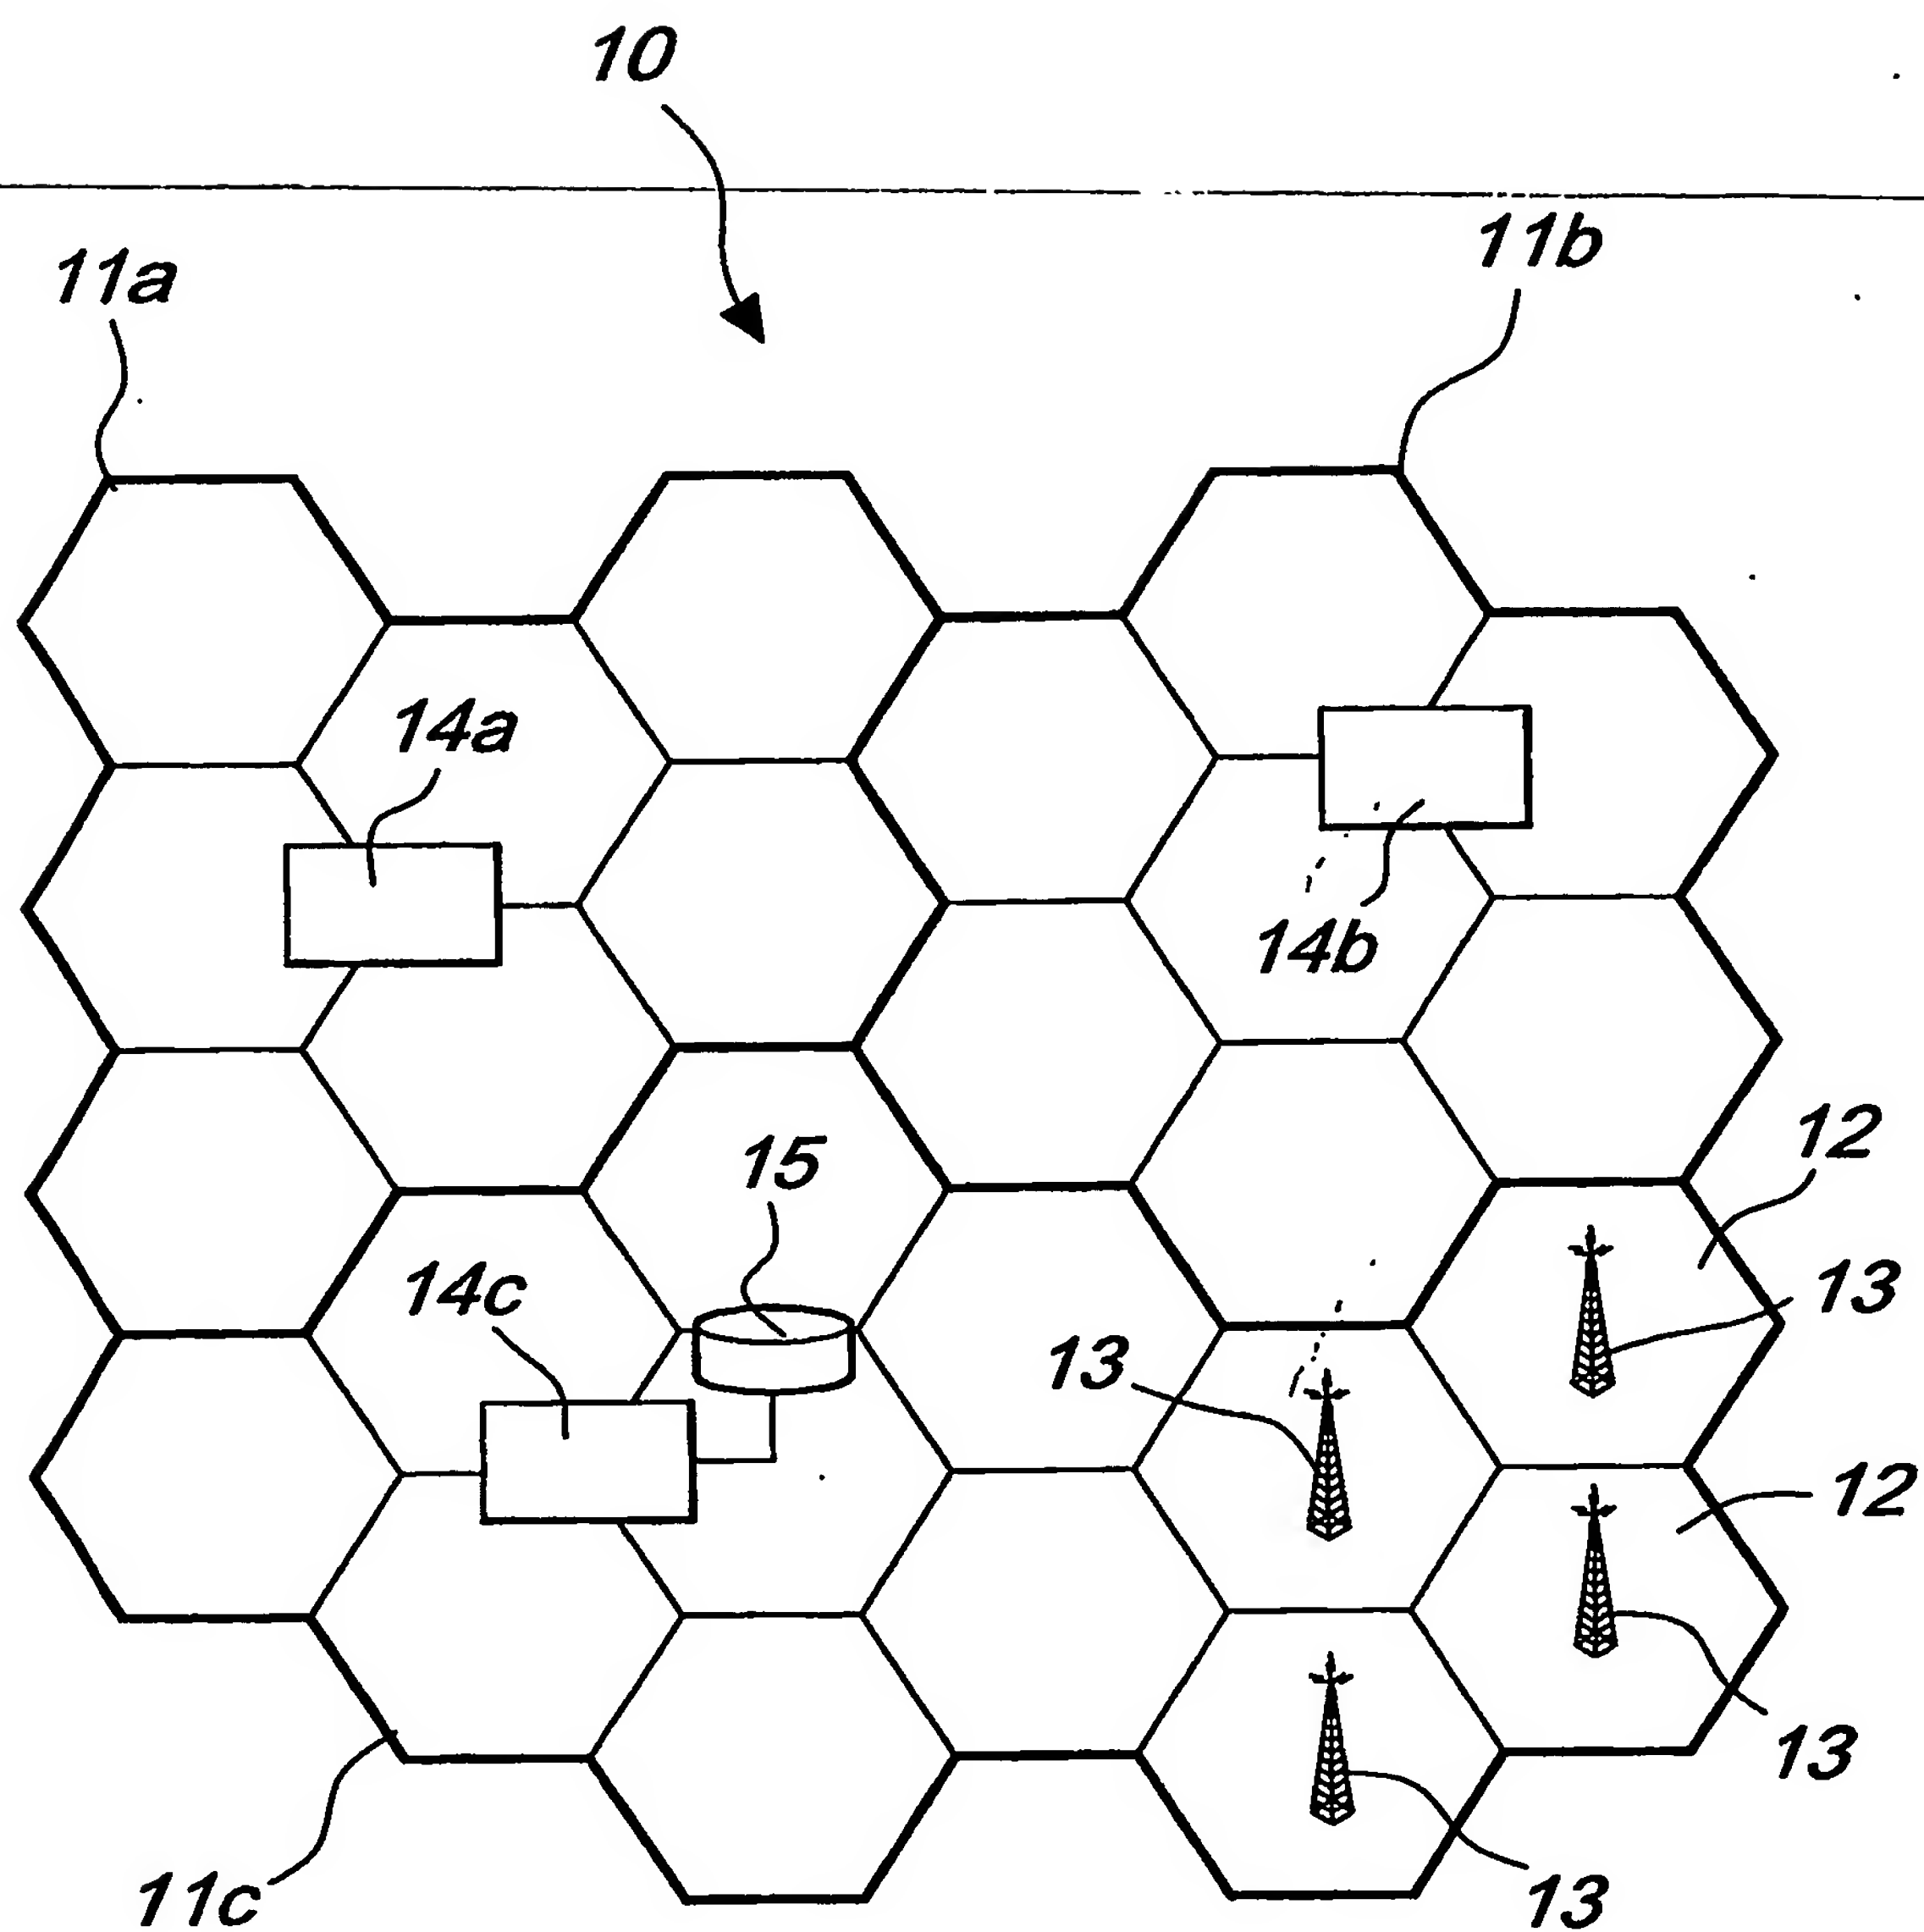
---

**METHOD AND TELECOMMUNICATIONS SYSTEM FOR CONTROLLING  
PAGING FLOW IN A NETWORK FOR CELLULAR COMMUNICATIONS**

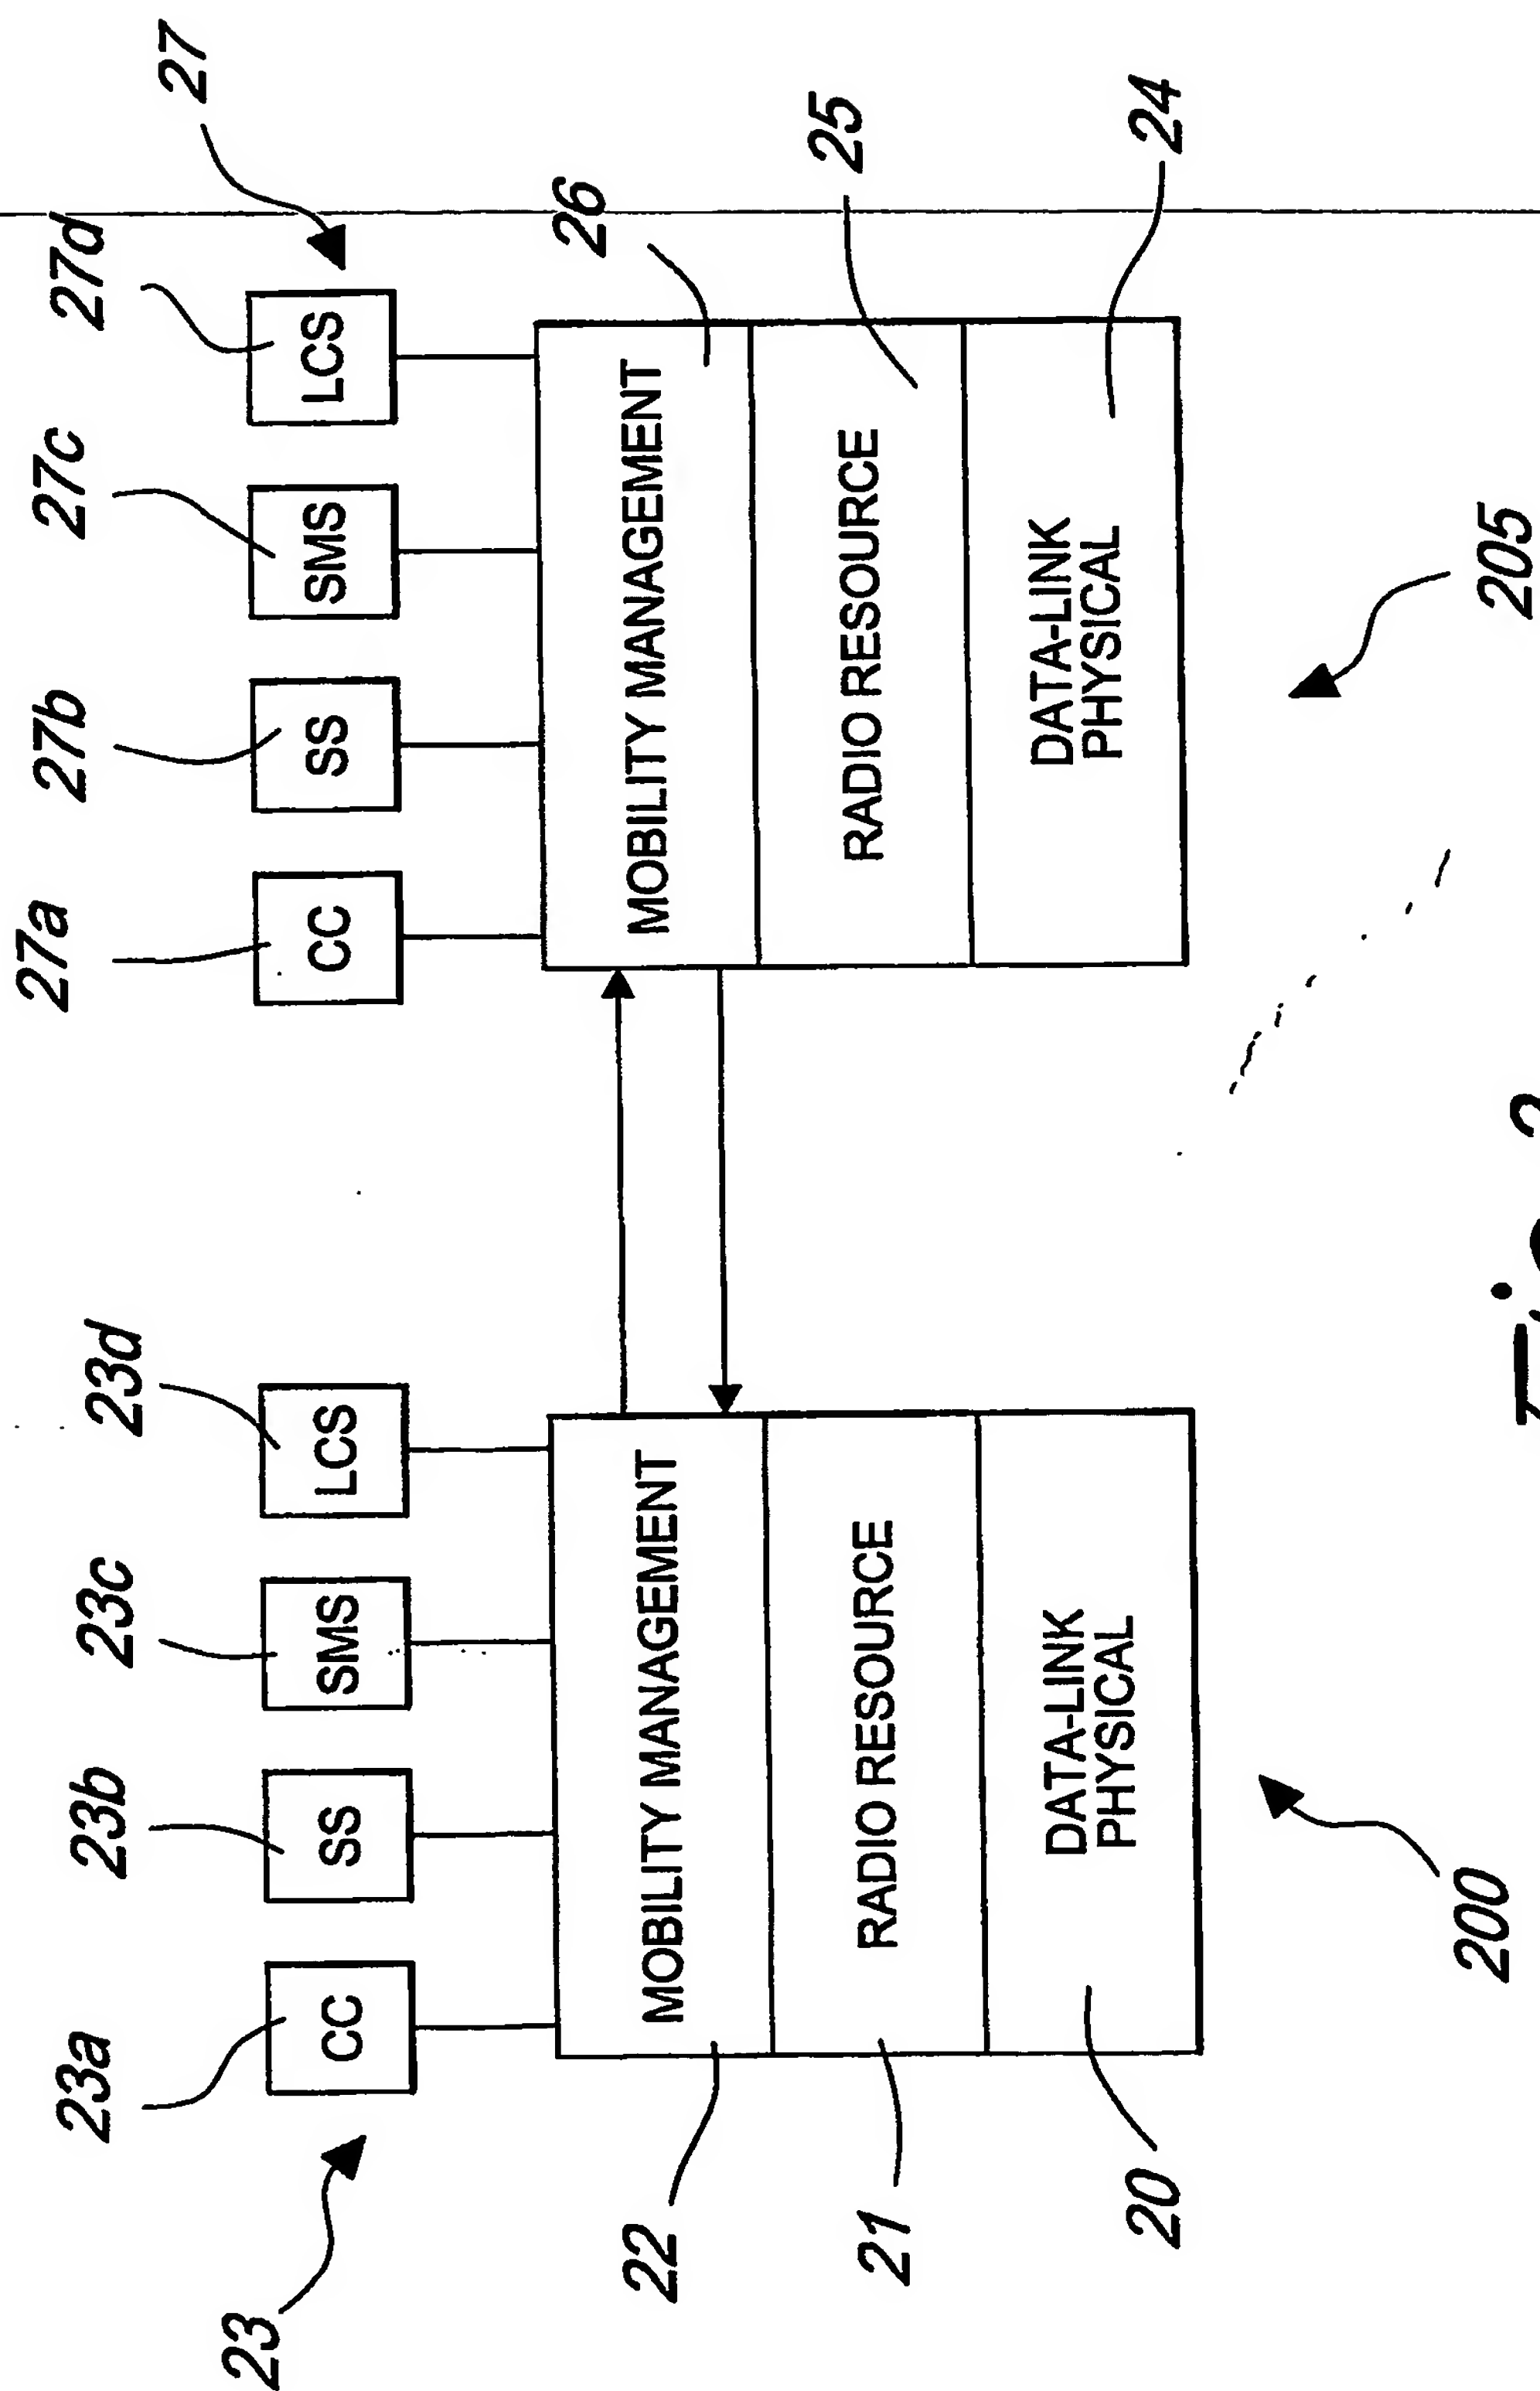
**Abstract of the disclosure**

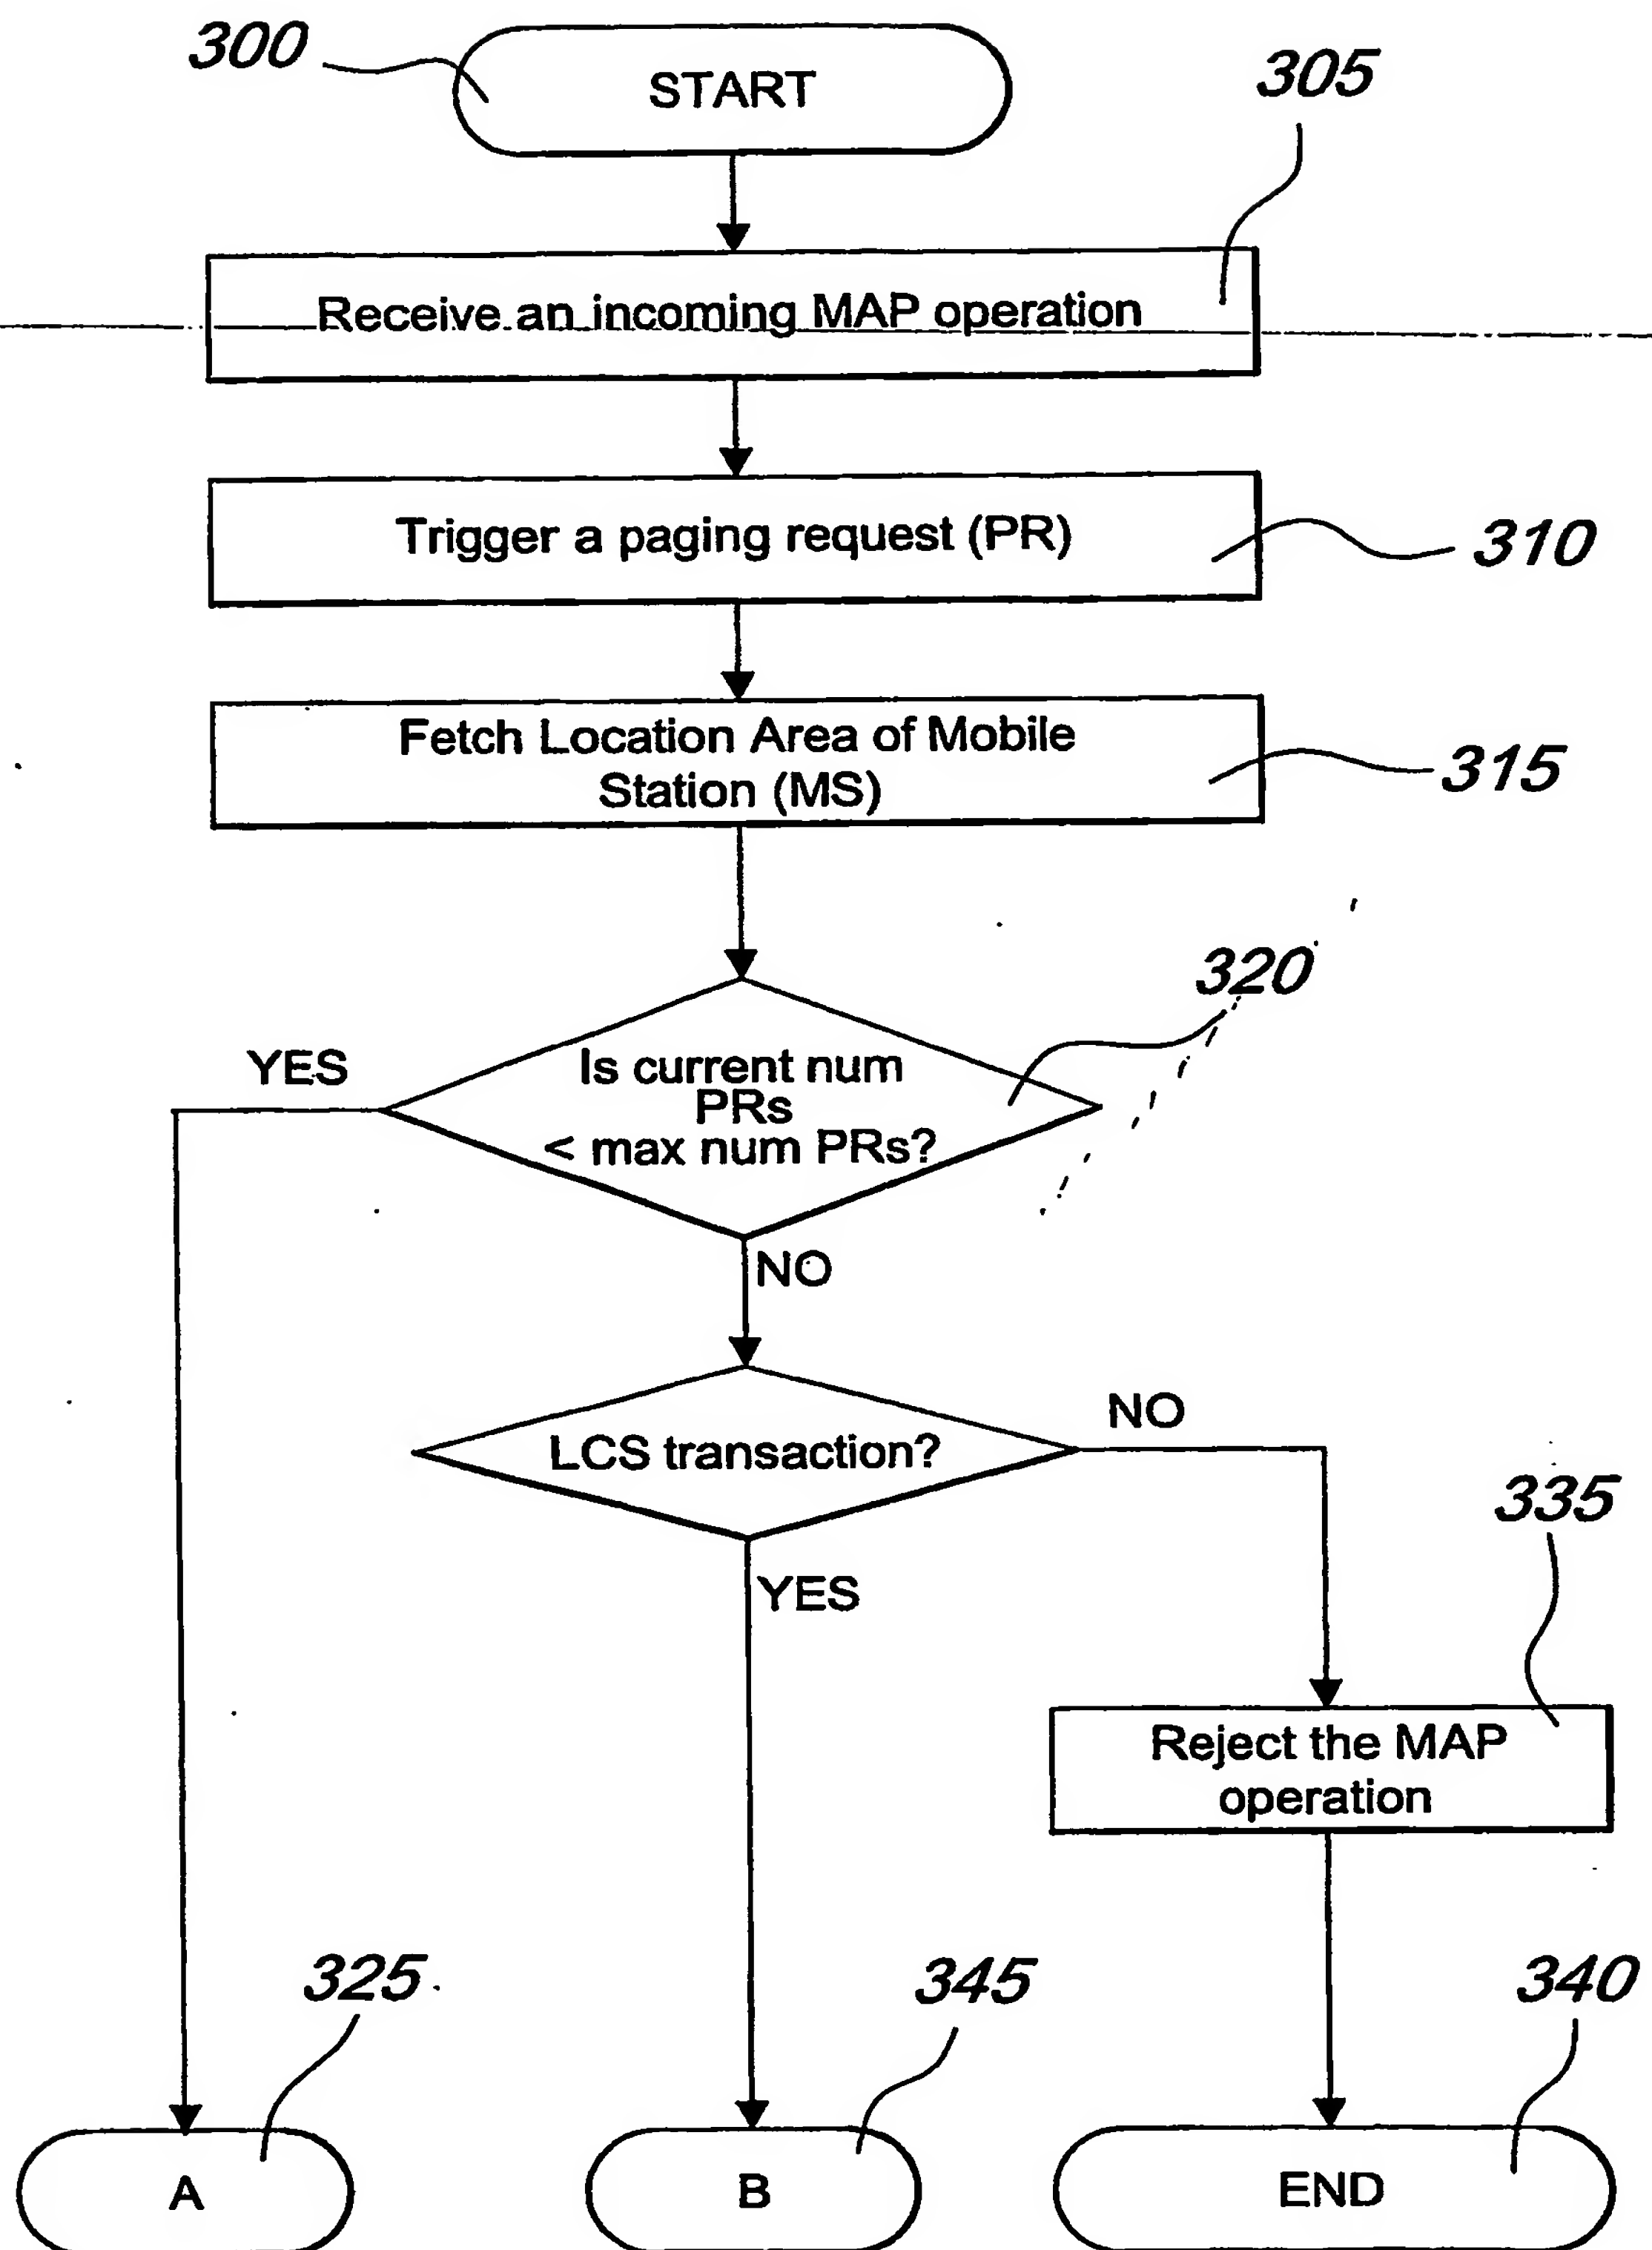
A method of controlling paging flow in a network for cellular communications is described, which comprises the steps of: at a control node, receiving a request for paging a mobile station; determining a location area in which the paging shall be performed; checking whether the number of paging transactions which are ongoing for the location area is lower than at least one maximum number of ongoing paging transactions allowed for the location area; after a determination that the number of ongoing paging transactions is lower than the maximum number, updating the number of ongoing paging transactions for the location area and processing the paging request. Preferably, if the number of ongoing paging transactions is not lower than the maximum number, it is checked whether the paging request is a particular LCS transaction and, if so, the request is placed in a buffer and served with priority as soon as the number of ongoing paging transactions returns to be lower than the maximum number.

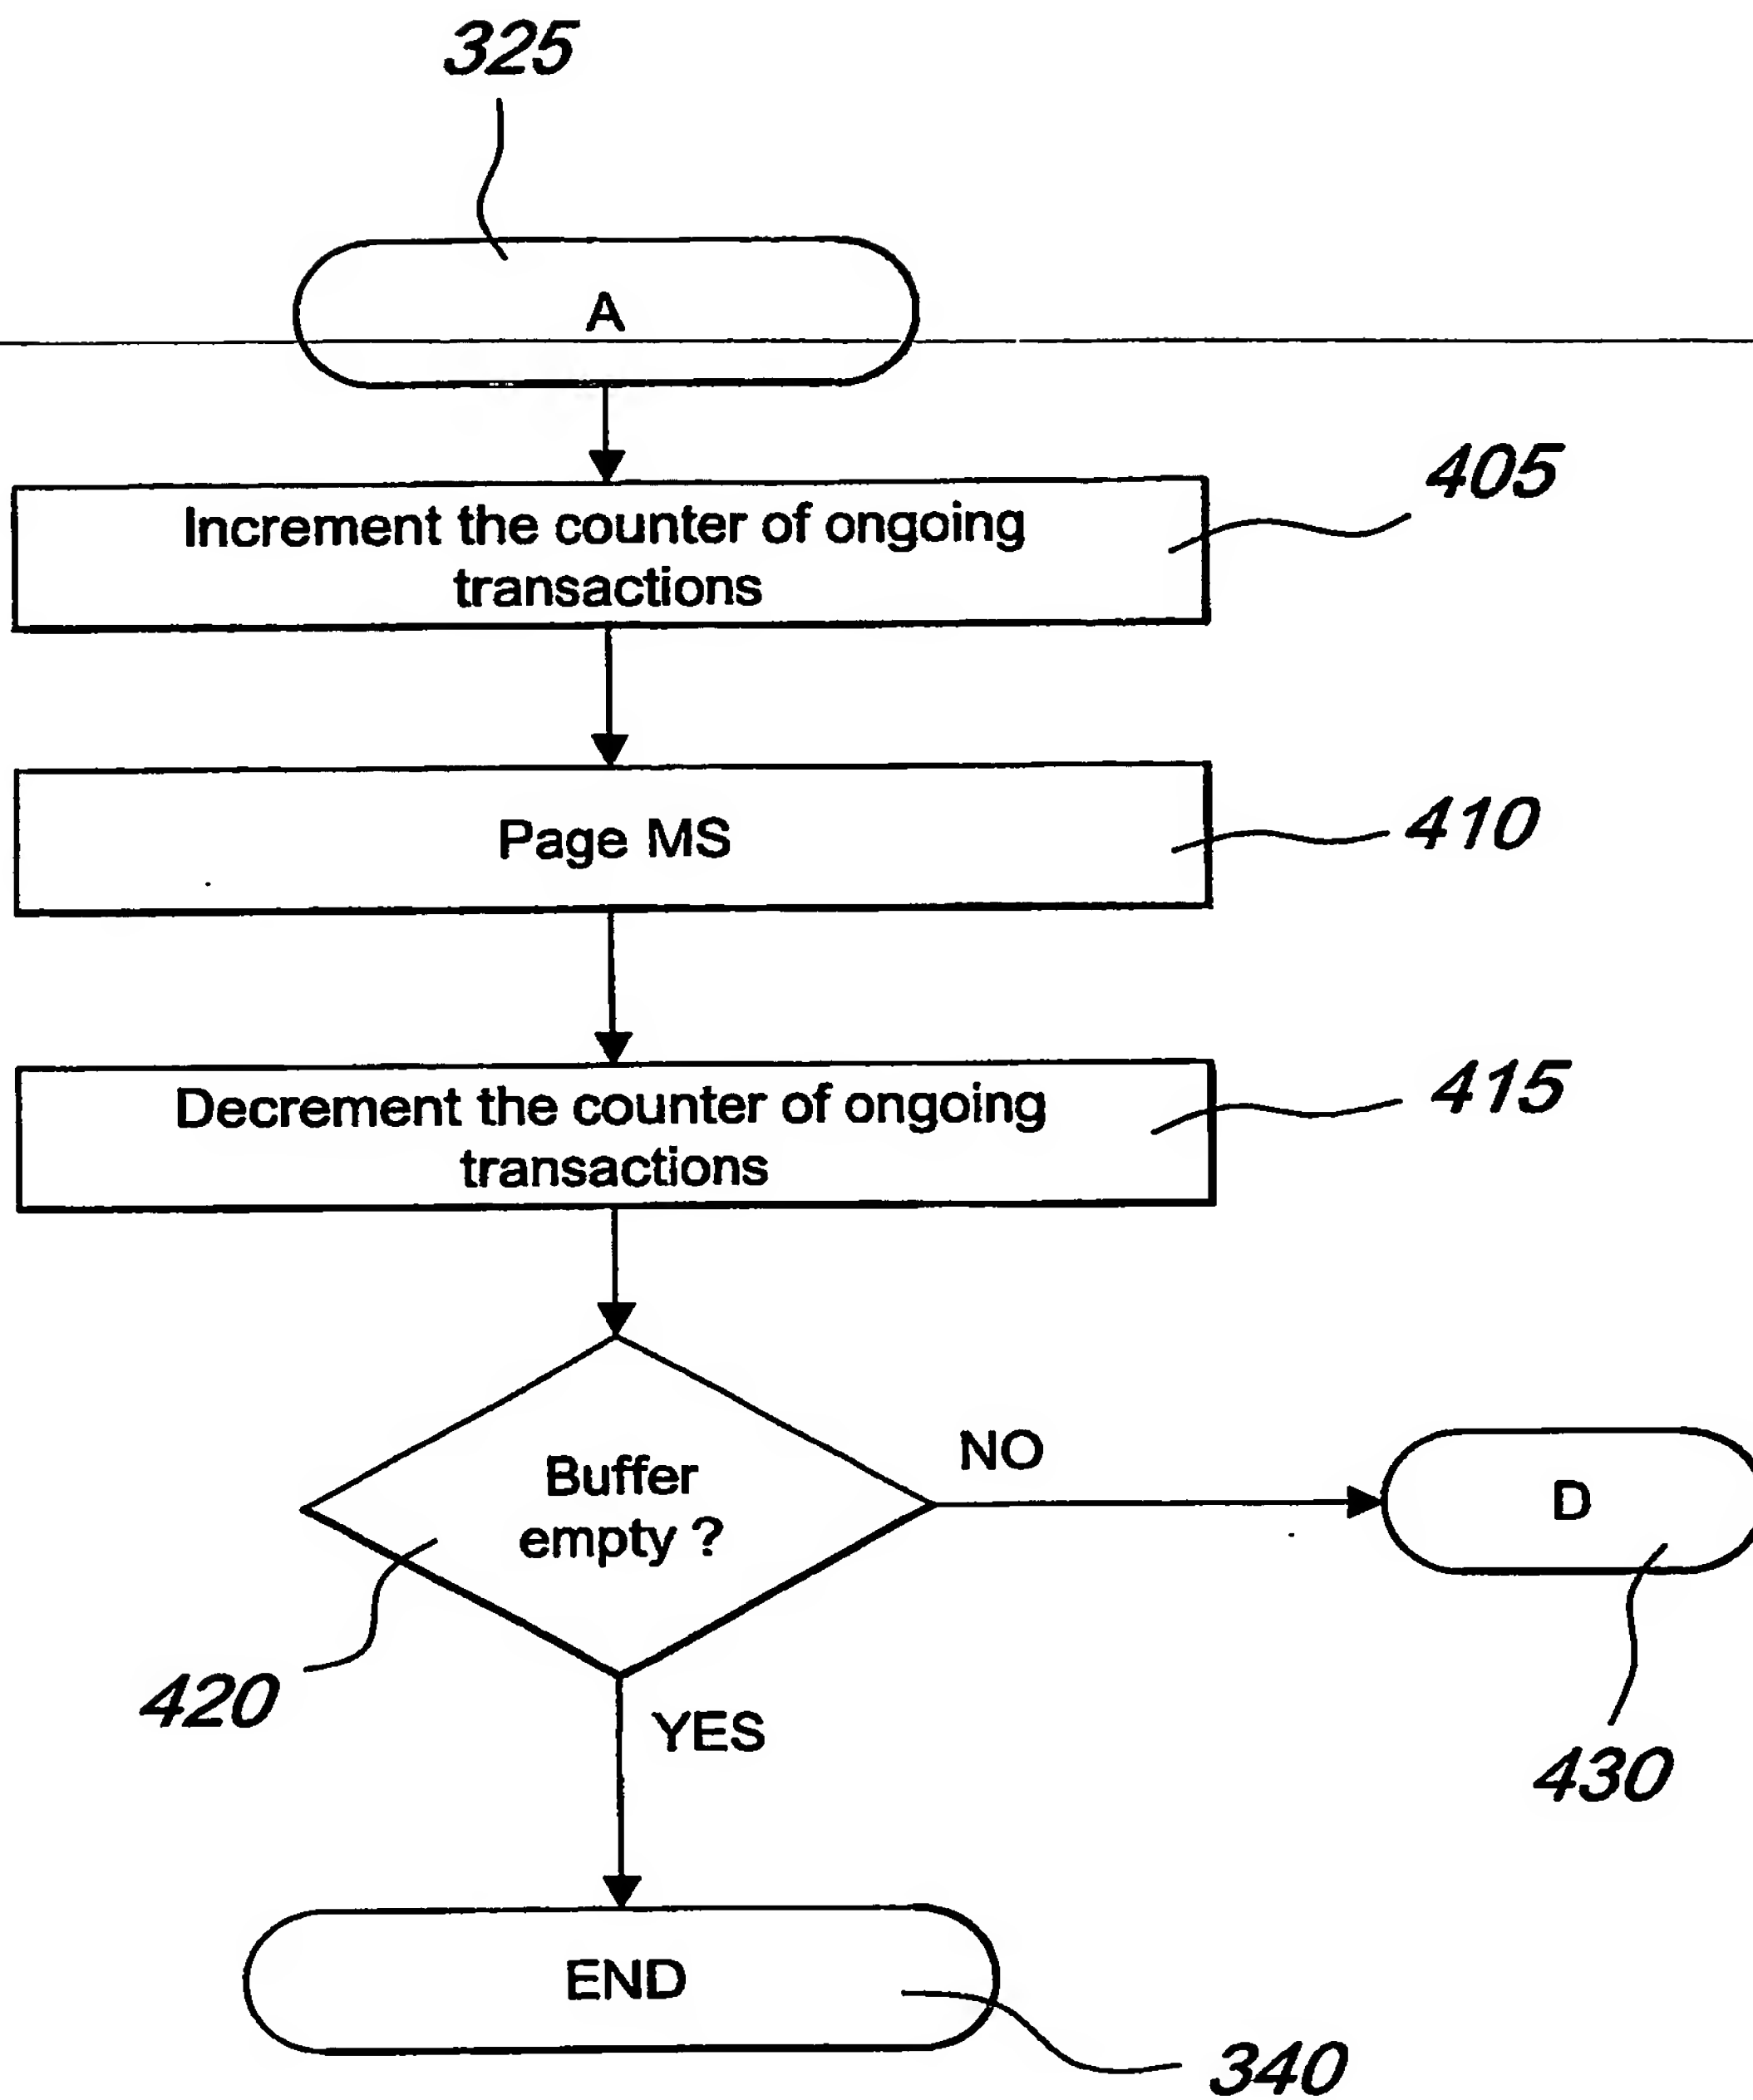
FIG. 3

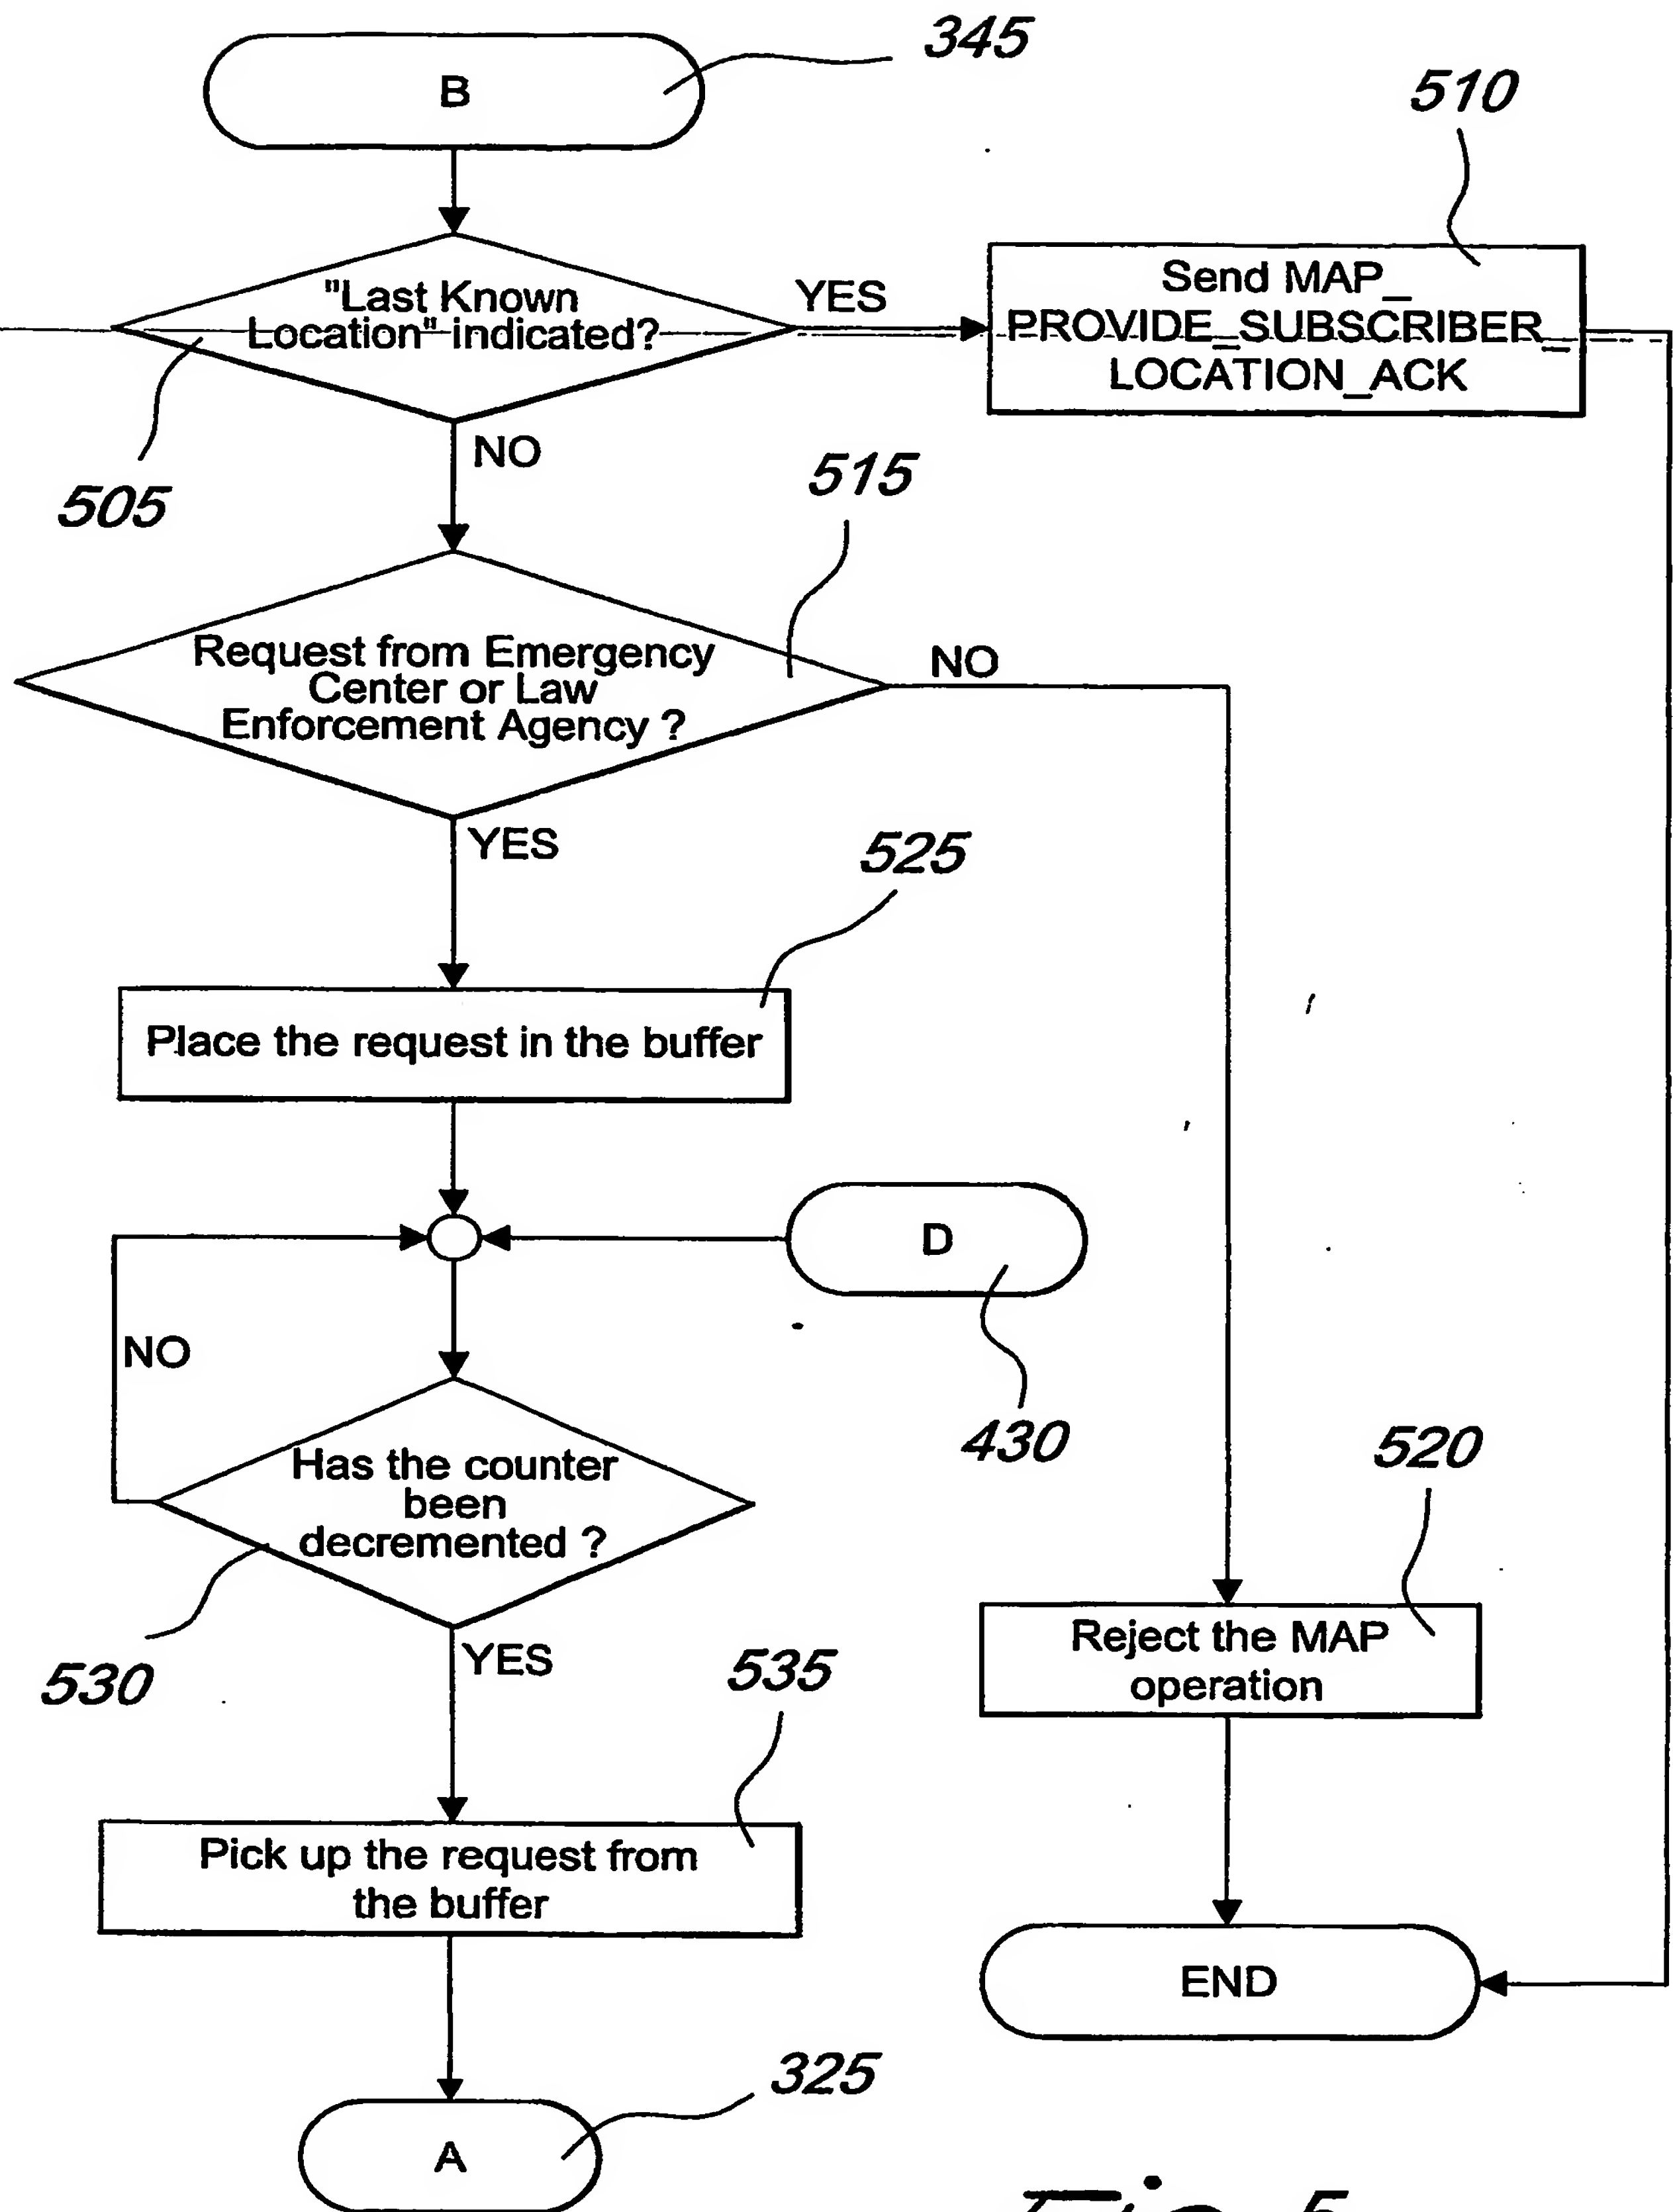


*Fig. 1*

*Fig. 2*

*Fig. 3*

*Fig. 4*

*Fig. 5*



# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/EP04/053621

International filing date: 20 December 2004 (20.12.2004)

Document type: Certified copy of priority document

Document details: Country/Office: EP  
Number: 03029277.5  
Filing date: 22 December 2003 (22.12.2003)

Date of receipt at the International Bureau: 15 February 2005 (15.02.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record.**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**